

With a sharp framed spilt face, the **Trendstone™** is a smart, practical and easy to install retaining wall system. The units available in the **Trendstone™** range can be used for straight walls, curves, corners and steps. A purpose made cap for the **Trendstone™** retaining wall gives your wall the finishing touch. **Trendstone™** is a distinctive retaining wall system suitable for any outdoor living project creating both the contemporary or classic atmospheres.


- ❖ Vertical Walls
- ❖ Low Maintenance and durable long term solution
- ❖ Civil or commercial walls to 6 metres high
- ❖ Suitable for any landscape solution
- ❖ Do-It-Yourself in one weekend
- ❖ No concrete footings required.
- ❖ Strong & Versatile

The **Trendstone™** wall system has a new revolutionary plastic locating guide member (pin) system, that is;

- Easy to use.
- Improves locking with Geogrid installations (For walls over 1m where Geogrid matting is required).
- A unique design which facilitates the in-bond feature.
- A guide and acts as an alignment tool.


FOR TERRACED WALLS, FENCES ABOVE WALLS AND ANY OTHER SPECIAL APPLICATION,  
CONTACT YOUR SUPPLIER OR VILLASTONE DIRECT ON 1300 781 620.

#### DETAILS

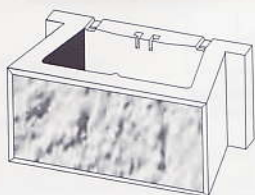


##### Trendstone™ Wall Unit

Size: 400x245x200mm  
No. per Tonne: 46.5  
No. per M<sup>2</sup>: 12.5  
No. per pallet: 78

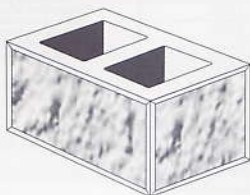

##### Trendstone™ Corner Unit

Size: 390x190x200mm  
No. per Tonne: 59  
No. per pallet: 90

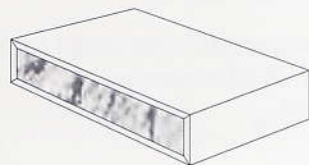

##### Trendstone™ Cap


Size: 400x255x65mm  
No. per Tonne: 70.5  
No. per Lm: 2.5  
No. per pallet: 120



##### Fortrac® Geo-grid

Roll Size: 2.5mWx200mL  
Types Available  
35/20-20; 55/30-20;  
80/30-20

#### STEPS

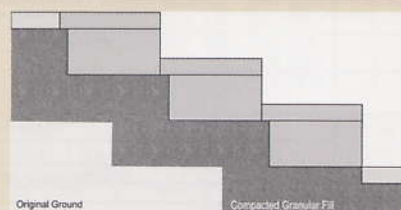

Steps can be easily built using **Trendstone** wall units and **Trendstone** capping units. Steps to be built with the wall units and capping units are then adhered to the top of the unit to form the step tread.

#### CORNERS

Corners are constructed by using the special purpose made corner blocks. Masonry adhesive (masonry liquid nails) is required when fixing these corner blocks together. **Trendstone** corner units can be cut to create ends and step downs if required.

#### CURVES

For convex curved walls simply knock the back fins off the block with a hammer.

MINIMUM DIAMETER - 2170mm  
(16 full units = 2330mm)

#### COLOUR RANGE

##### Designer Range



Fraser Sand



Fraser Coral



Ivory

##### Standard Range



Charcoal



Pebble

Colours shown are a guide only, contact our Sales Office for a list of our display centres.

Patent Pending